


iIOT-P

Pulse Water Meter with iIoT Pulse Sensor

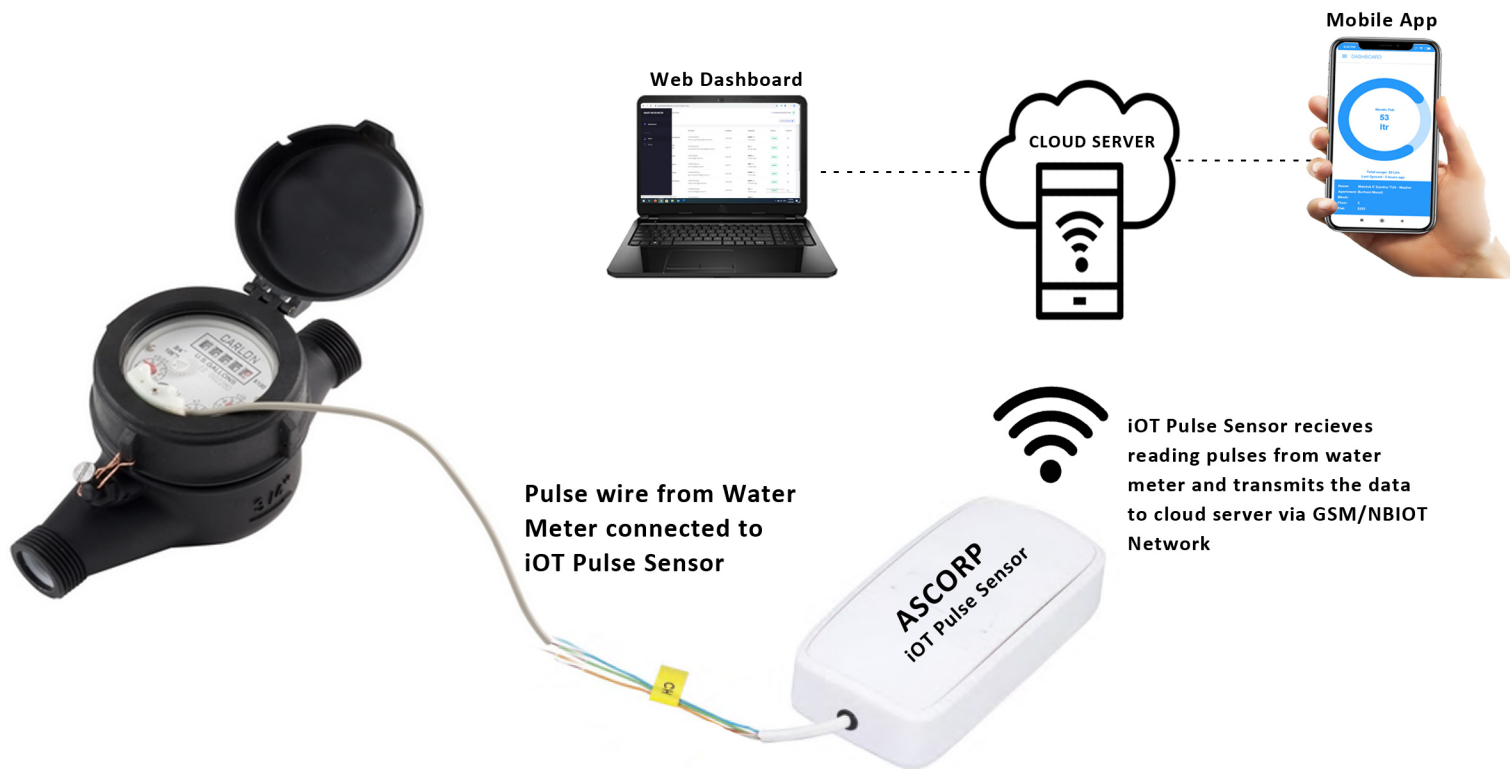

- In this variation we will use Water Meter with Pulse output wires which will be connected to the iIoT Sensor and the water meter sends pulse signals via pulse output wires to the iIoT Sensor, (the pulses are if the water flow volume from the water meter crosses 1 Ltr, the meter will give 1 pulse to the iIoT Sensor.
- The iIoT Sensor receives the pulses and in return transmits the same to the cloud server using the network from the iIoT sim inserted.
- The iIoT Sensor runs on a lithium battery which can last upto 10 Years.
- The iIoT Sensor can record pulse data every minute (configurable)
- The iIoT Sensor has an internal Flash Memory
- 1 One iIoT Sensor can be connected with 3 Three Water Meters.
- The Cloud Server receives all the pulse data with time stamp via iIoT Sim Network from the iIoT Sensor wirelessly.
- The Cloud Server will analyse the data and reflect the same in the mobile app interface or web dashboard in respective user as well as admin or super admin accounts.

TYPICAL INSTALLATION

8 Storey High Rise Apartment
with 2 inlets into each home.

1. Mechanical Water Meter with
Pulse Output

2. NB-IOT Pulse Sensor

4. Cloud Server Database

4. Cloud Admin Account


5. User Account

Mechanical Water Meter With
Register Counter + Pulse Output
1 Pulse = 1 Ltr

Sizes Available :-
15mm, 20mm, 25mm
32mm, 40mm, 50mm

Supply Line Water Meter
with Pulse Output
1 Pulse = 100 Ltrs
Size Available From :- 40 -500mm

Variation : ASP-NB-IOT

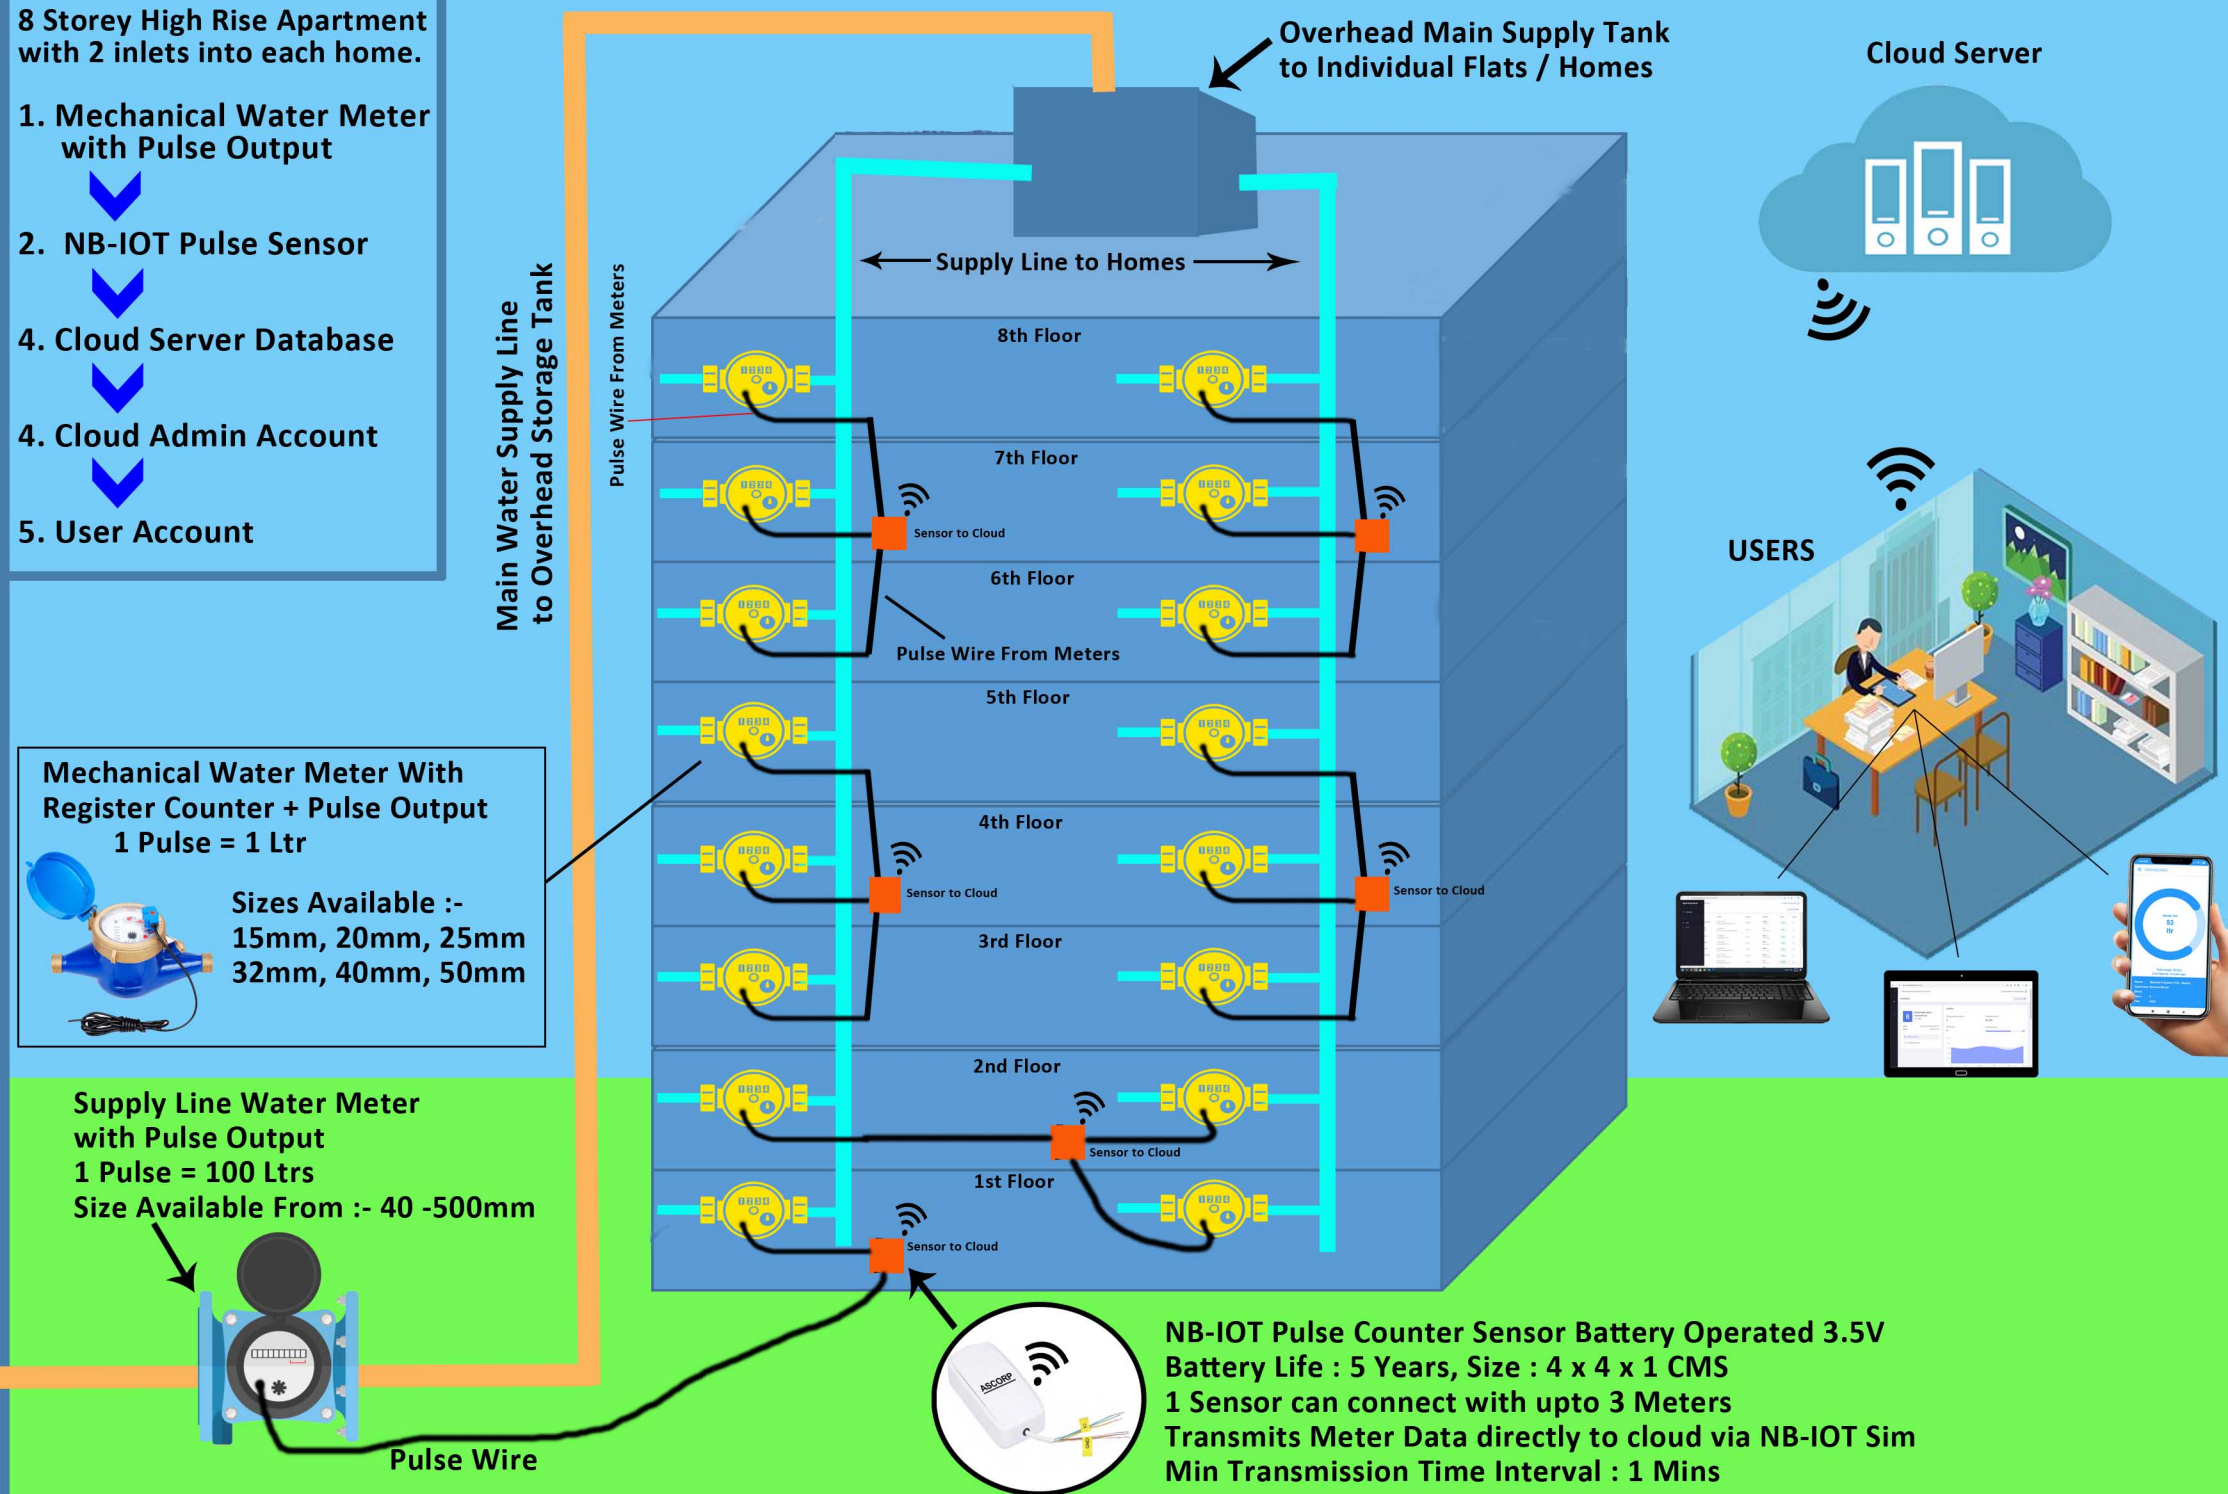

NB-IoT

Wireless pulse counter - water

SKU: NB-IOTWP100012

Ascorp pulse counter is used to remotely monitor water flow through a water meter in order to control the water consumption and related expenses. You can connect it to any water meter equipped with Standard output (SO) or pulse generator. The solution is dedicated for dispersed facilities, in which control of the water consumption is impossible or expensive. Analysis of meter's data allows you to decrease water bills and quickly detect anomalies and minimize the effects of flooding. The sensor can simultaneously work with up to three water meters. By default, each counted pulse represents one liter of flowing water (l). Data is presented in the form of water flow (in liters per minute) or in the form of water consumption over a selected period of time (in m³).



Ascorp NB-IoT pulse counters transmit the data over cellular network (Narrowband IoT) and do not require any additional devices (router, gateway, etc.). Pulse counters are also equipped with Bluetooth Low Energy interface, which allows quick and easy configuration with a smartphone. Ascorp NB-IoT pulse counters can be integrated with any cloud platform.

KEY FEATURES

- **Long battery life**
Loggers have been designed to work for up to 10 years on batteries. You do not have to remember about changing the batteries frequently or troublesome batteries charging.
- **Lower costs**
Choosing wireless sensors and a cloud platform reduces the installation and maintenance costs.
- **Wide range of sensors**
Ascorp sensors can measure various physical and chemical values. If you decide on one sensor today, you can expand your sensors fleet to another types anytime you want.
- **Any cloud platform**
Standard communication protocols allow integration with any cloud platform or mobile application. Logger works with Ascorp Cloud out of the box.
- **Easy set up**
All you need to set up a logger is a smartphone with a free mobile application. The whole configuration takes no more than 15 minutes.
- **Remote configuration and updates**
All logger settings can be configured remotely from the cloud platform. Moreover, logger's software can be updated remotely.

TECHNICAL DATA

Versatility

- The counter can cooperate with any device equipped with a pulse output

Up to 3 channels

- Simultaneous operation with up to 3 devices
- Supported counters: NO (Pull-up 3.6V)

NB-IoT

- NB-IoT band: 8, 20
- 3GPP: Release 13
- Power: 23 dBm \pm 2 dB

Bluetooth Low Energy interface

- Radio module frequency: 2,4 GHz
- Power: 2,5 mW (4 dBm)
- Range: up to 100 m (LOS)
- Transmission period: 1 s

Communication

- Protocol: CoAP;
- Transmission interval: 5 minutes – 10 days, configurable

Minimum pulse duration

- 5 millisecond

Maximum pulse duration

- 500 millisecond

Power supply

- Replaceable AA batteries 2 x AA, 4200 mAh or 3 x AA, 6300 mAh. Battery operating time: up to 10 years
- USB 5V with 1000 mAh rechargeable battery

Mechanical

- Dimensions: 28 x 60 x 124 mm
- Weight: 110 g (including batteries)
- Enclosure: plastic ABS, color white, IP30

Environmental

- Operating
 - ◆ Temperature: -35° to 70°C
 - ◆ Humidity: 0 to 99% non-condensing
- Storage and transportation
 - ◆ Temperature: -40° to 70°C

ADDITIONAL INFORMATION

Universal pulse counter

Ascorp wireless pulse counter can work with any water meter equipped with standard output (SO). The pulse counter has three channels and can count pulses from up to three meters simultaneously.

Edge analytics

Devices analyse the data and send it to cloud platform when needed. This allows to decrease the number of cellular transmissions and increase the battery lifetime. There are several types of analyses that can be performed by the sensor: from a simple comparison of the measured value to the threshold to more complex mathematical operations.

Software over the air update (SOTA)

The sensors are equipped with over the air software update mechanism, thanks to which, your fleet of sensors will always have the latest version of software. Moreover, SOTA is based on delta mechanism and only the difference between the current and the new version of the software is sent to the device. This saves both the battery and data transfer.

Full remote configuration

All the settings of the NB-IoT sensors can be changed remotely in a secure way. This allows you to easily reconfigure thousands of the deployed devices, no matter how far they are located.

Integration

We believe that the Internet of Things is about integrating data sources, analysing the data and drawing conclusions based on it. If you want to integrate Ascorp loggers with your software, cloud platform or mobile application, we will provide you with the necessary documentation, libraries, SDKs and we will gladly assist you.